


Pneumatic Tacker

380/16-420

The light but powerful 420 tacker drives 80 and 380 staples in leg lengths from 5/32" to 5/8". Low air consumption, durability and ease of maintenance make the 420 tacker a real cost saver. The bottom loading allows for fast and easy loading. The ergonomic design of the 420 tacker results in less operator fatigue. An integrated silencer provides surprisingly quiet operation. The BeA 380/16-420 is a versatile tool suited for industrial use as well as for use by the craftsman.

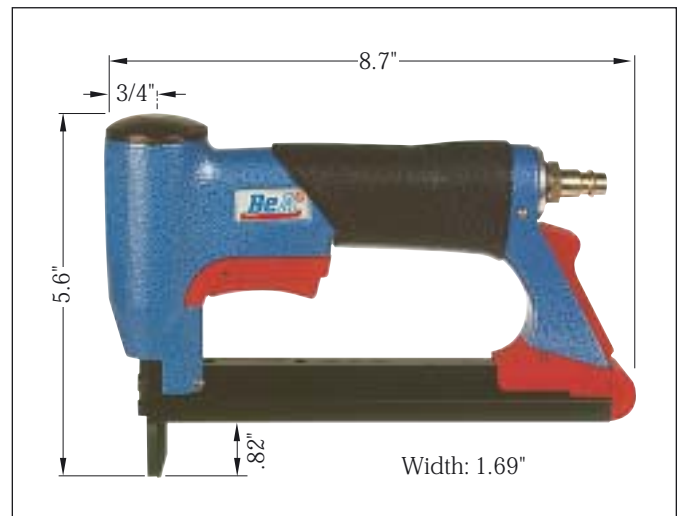

Popular applications:

Upholstered furniture, TV and stereo cabinets, wicker and rattan furniture, automobile industry, bedding industry

Technical Data

Model:	380/16-420 Standard	380/16-420 w/work contact
Part number:	12000063	12000065
Loading type:	bottom loading	bottom loading
Work contact:		contact trip
Staple type:	80, 380	80, 380
Magazine capacity:	157	157
Standard load, strips x staples/strip:	1 x 100 Type 80 / 1 x 150 Type 380	1 x 100 Type 80 / 1 x 150 Type 380
Operating pressure:	75-90 P.S.I.	75-90 P.S.I.
Maximum air pressure:	90 P.S.I.	90 P.S.I.
Air consumption:	.01 cu. ft./cycle @ 90 P.S.I.	.01 cu. ft./cycle @ 90 P.S.I.
Recommended hose I.D.:	ø 3/8"	ø 3/8"

Weight:	2.07 lbs.	2.14 lbs.
---------	-----------	-----------

Items supplied with tool:	Operating instructions, spare parts list & service instructions.
---------------------------	--

Subject to technical modifications.

Accessories:

Part number	Description
14400679	Special back nose assembly for 3 mm and shorter staples only
14406023	Special back nose assembly for 6 mm and shorter staples only
14403330	Remote firing valve assembly

All BeA pneumatic tools can be jig mounted.
We supply the necessary accessories.



This tool conforms to the EC Directive
for Machinery (89/392 EWG)


Pneumatic Tacker

380/16-420



BeA Fasteners U.S.A.
2100-120 Fairfax Road
Greensboro, NC 27407
Phone: (336) 510-4232
Fax: (336) 510-4233

Staple types 80/380



Description	L = Length inches
80/04 NK	5/32"
80/05 NK	3/16"
380/06 NK	1/4"
380/08 NK	5/16"
380/10 NK	3/8"
380/12 NK	1/2"
380/14 NK	9/16"
380/16 NKS	5/8"

Other lengths and finishes are also available on request.

Fastener nomenclature:

NK = Galvanized steel
NKS = Galvanized steel, high carbon
BK = Brite steel
BKS = Brite steel, high carbon

HZ = Resin coated
NR = Stainless steel
DP = Divergent point