


# Pneumatic Stapler

## 14/32-613

A lightweight compact shaped and particularly well-balanced tool with an integrated silencer. Easy to service. The 14/32-612 stapler drives 14 type staples from 5/8" to 1 1/4". The easily fitted attachments make the tool a valuable asset for application such as fastening spring clips in furniture assembly.

### Popular Applications

Furniture industry, caravans, general carpentry, pallets and boxes, panelling.

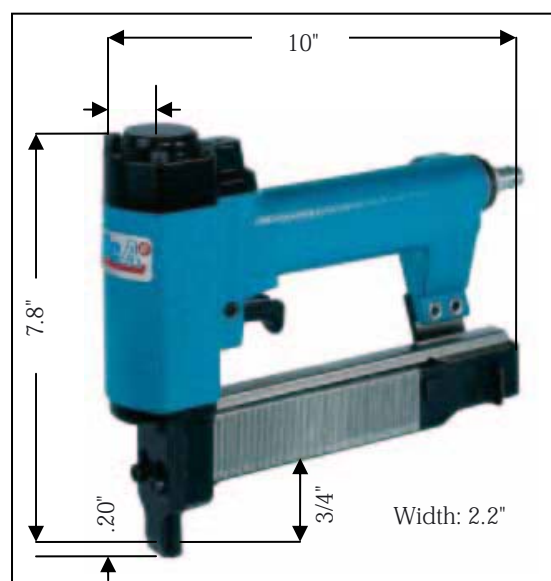

### Technical Data

Model:	<b>14/32-613</b>
	Standard
Part number:	12000215
Magazine type:	top loading
Type of work contact:	work contact
Fastener type:	14
Magazine capacity:	110
Standard load, strips x staples/strip:	1 x 75
Operating pressure:	75-120 P.S.I.
Maximum air pressure:	120 P.S.I.
Air consumption:	.0031 cu. ft./cycle @ 90 P.S.I.
Recommended hose I.D.:	ø 3/8"

Weight:	3.3 lbs.
---------	----------

Items supplied with tool:	Operating instructions, spare parts list, service instructions.
---------------------------	---

Subject to technical modification.

### Accessories

Part number	Description
14400840	Adjustable roller edge guide, flexible
14400881	Attachment for Nosag clip
14403421	Remote firing valve
14403527	Stationary mounting fixture

All BeA pneumatic tools can be jig mounted.  
We supply the necessary accessories.



This tool conforms to the EC Directive  
for Machinery (89/392 EWG)


# Pneumatic Stapler

## 14/32-613



BeA Fasteners U.S.A.  
2100-120 Fairfax Road  
Greensboro, NC 27407  
Phone: (336) 510-4232  
Fax: (336) 510-4233

### Staple type 14

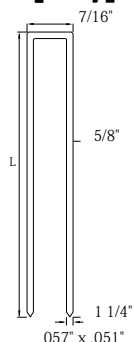

Description	L = Length inches
14/15 NK HZ	9/16"
14/18 NK HZ	11/16"
14/21 NK HZ	13/16"
14/25 NK HZ	1"
14/30 NK HZ	1 13/16"
14/32 NK HZ	1 1/4"
14/25 NR HZ DP	1"

Other lengths and finishes are also available on request.

#### Fastener nomenclature:

NK = Galvanized steel  
NKS = Galvanized steel, high carbon  
BK = Brite steel  
BKS = Brite steel, high carbon

HZ = Resin coated  
NR = Stainless steel  
DP = Divergent point