


Pneumatic Stapler Type 94/32-614

A lightweight and particularly well balanced tool
The compact design of the 94/32-614 stapler makes an ideal tool for high speed applications and for getting into hard to reach staple placements. This efficient stapler drives staples type 94 in length from 15 to 32 mm.

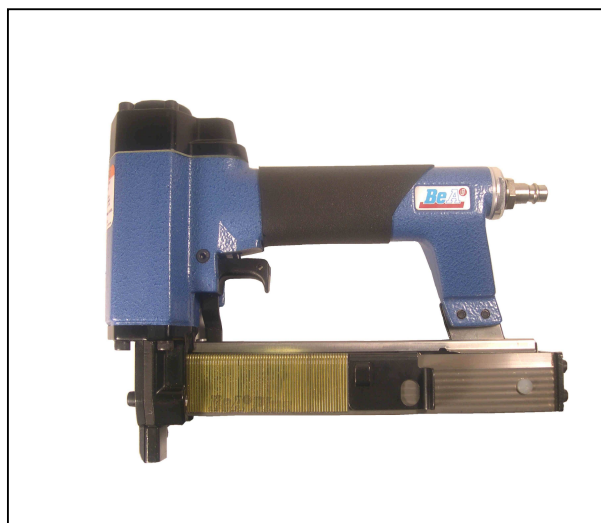

Popular applications:

Caravan fabrication, doors, bedding, furniture, packaging

Length: 228 mm
Width: 56,5 mm
Height: 198 mm

Technical data

Type description:	94/32-614 Contact	94/32-614 Single
Article code:	12000220	12000222
Magazine type :	Top loader	Top loader
Safety:	Contact actuation	Single actuation
Fastener type:	Type 94	Type 94
Magazine capacity:	125	125
Fasteners per strip:	1 x 100	1 x 100
Operating pressure:	5 – 8 bar	5 – 8 bar
Max. operating pressure:	8 bar	8 bar
Air consumption/operation:	0,9 litre / 6 bar	0,9 litre / 6 bar
Inner hose diameter:	Ø 9 mm LW recommended	Ø 9 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d= 79 dB	L pA, 1s, d= 79 dB
Single-shot emission sound pressure level:	L WA, 1 s,d= 87 dB	L WA, 1 s,d= 87 dB
Weight:	1,6 kg	1,6 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is under the declaration limit as per EN 292-1, amendment A.

Extras supplied with the nailer:

Operating instructions, spare parts list, service instructions, silencer.
For safety reasons we recommend the BeA single release if working pressure allows this.

Subject to technical modifications.

Accessories:

Articel code	Description
14400859	Roller Edge Guide, resilient
14400913	Guide Plate with high-adjustable stop
14403421	Remote valve
14403527	Mounting flange
14406197	Single actuation set
14406951	Grip elongation


All BeA pneumatic tools can be jig-mounted
We supply the necessary accessories and equipments.



This tool conforms to the EG Directive
for Machinery (89/392 EWG)

Pneumatic Stapler Type 94/32-614

Staples type 94



BeA Deutschland
Befestigungstechnik
P.O.Box 14 80
D-22904 Ahrensburg
Phone: (04102) 78-0
Fax: (04102) 78-250
www.bea-group.com
e-mail: info@bea-group.com

a division of
Joh. Friedrich Behrens AG

Description	L = Length mm
94/15 NK HZ	15
94/18 NK HZ	18
94/21 NK HZ	21
94/25 NK HZ	25
94/30 NK HZ	30
94/32 NK HZ	32

Other lengths and finishes are also available on request.

Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	MS = brass	RF = rust resistant, material 1.4301	SA = step cut