

Pneumatic Nailer


SK 338-616

The BeA Pneumatic Nailer SK 338-616 drives finish nails from 3/4" to 1 1/2". The top loading device guarantees quick and safe loading. The nails can be delivered in a variety of head-colors as well as in stainless steel.

The available accessories make the SK 338-616 even more versatile.

Popular Applications:

Glazing strips, wicker work, furniture, corner trims.

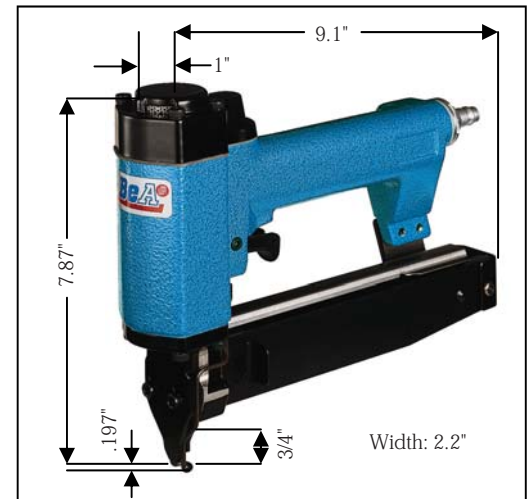


Technical Data

Model:	SK 338-616
	Standard
Part number:	12000225
Loading type:	top loading
Fastener type:	SK 300 finish nails
Magazine capacity:	125
Standard load, strips x fasteners/strip:	2 x 50
Working pressure:	75-120 P.S.I.
Maximum air pressure:	120 P.S.I.
Air consumption:	.031 cu. ft./cycle @ 90 P.S.I.
Recommended hose I.D.:	ø 3/8"
Weight:	3.46 lbs.

Items supplied with tool: Operating instructions, spare parts list, service instructions, silencer.

Subject to technical modifications.

Accessories

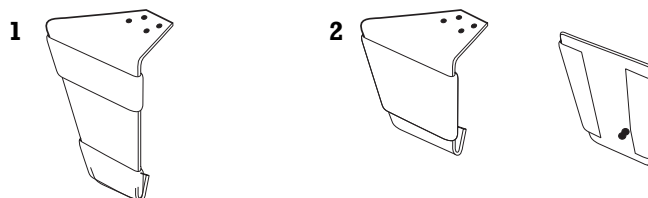

	Part number	Description
1	14400816	Glazer work contact shoe
2	14400818	Glazer work contact shoe including lateral guide
	14403421	Remote firing valve
	14403527	Stationary mounting cap

All BeA pneumatic tools can be jig mounted.
We supply the necessary accessories.



This tool conforms to the EC Directive
for Machinery (89/392 EWG)


Pneumatic Nailer

SK 338-616



BeA Fasteners U.S.A.
2100-120 Fairfax Road
Greensboro, NC 27407
Phone: (336) 510-4232
Fax: (336) 510-4233

SK 300 finish nail

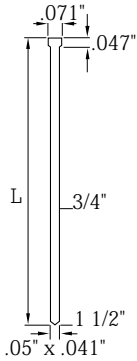

Part number	Description	L = Length in.	Quantity M Box	Carton	Weight Carton lbs.
10300344	SK 319 NK	3/4"	7	98	39
10300025	SK 322 NK	7/8"	3.5	84	38.36
10300342	SK 325 NK	1"	7	70	36.37
10300362	SK 330 NK	1 3/16"	3.5	56	34.83
10300049	SK 335 NK	1 3/8"	3.5	56	43.43
10300058	SK 338 NK	1 1/2"	3.5	42	35.49
10300422	SK 335NR	1 3/8"	3.5	56	43.43

Other lengths and finishes are also available on request.
The SK 400 finish nail heads are colored brown (standard).

Fastener nomenclature:

NK = Galvanized steel
NKS = Galvanized steel, high carbon
BK = Brite steel
BKS = Brite steel, high carbon

HZ = Resin coated
NR = Stainless steel
DP = Divergent point