


Pneumatic Stapler

90/40-621

The BeA 90/40-621 is a light-weight, well-balanced tool, that operates quietly and efficiently while driving narrow crown staples up to 1 1/2". The compact design allows the tool to be used even in hard to reach areas. The narrow nose makes the 90/40-621 the ideal tool for interior construction.

Popular Applications

Bag closure, tagging, packaging, automotive, shoe industry, arts & crafts, light assembly.

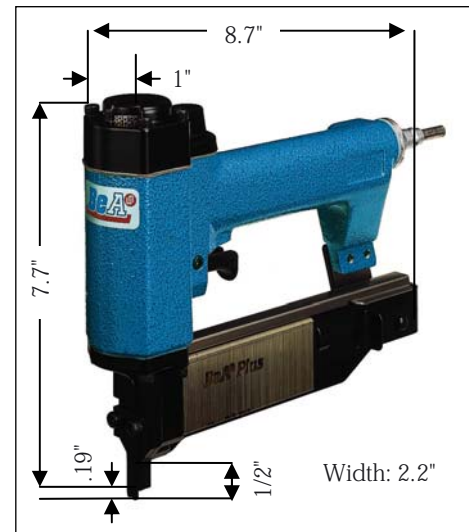

Technical Data

Model:	90/40-621
Part number:	12000230
Magazine type:	top loader
Work contact:	bump trip
Fastener type:	90
Magazine capacity:	125
Standard load, strips x staples/strip:	1 x 100
Operating pressure:	75-120 P.S.I.
Maximum operating pressure:	120 P.S.I.
Air consumption/cycle:	.031 cu. ft./cycle @ 90 P.S.I.
Recommended hose I.D.:	Ø 3/8"

Weight:	2.95 lbs.
---------	-----------

Items supplied with tool:	Operating instructions, spare parts list, service instructions, silencer.
---------------------------	---

Subject to technical modification.

Accessories

Part number	Description
14403421	Remote firing valve
14403527	Stationary mounting fixture

All BeA pneumatic tools can be jig-mounted.
We supply the necessary accessories.



This tool conforms to the EC Directive
for Machinery (89/392 EWG)


Pneumatic Stapler

90/40-621



BeA Fasteners U.S.A.
2100-120 Fairfax Road
Greensboro, NC 27407
Phone: (336) 510-4232
Fax: (336) 510-4233

Staple type 90



Description	L = Length inches
90/15 NK HZ	5/8"
90/18 NK HZ	3/4"
90/21 NK HZ	7/8"
90/25 NK HZ	1"
90/28 NK HZ	1 1/8"
90/32 NK HZ	1 1/4"
90/38 NK HZ	1 1/2"

Other lengths and finishes are also available on request.

Fastener nomenclature:

NK = Galvanized steel
NKS = Galvanized steel, high carbon
BK = Brite steel
BKS = Brite steel, high carbon

HZ = Resin coated
NR = Stainless steel
DP = Divergent point