


Pneumatic Stapler

14/50-763

This light, well balanced and rugged heavy duty stapler drives BeA type 14 and type 16 staples from 1" to 2" in length. The top loading magazine holds 150 staples. The 14/50-763 stapler has a quick release nose for easy jam clearance. The slender nose affords better operator visibility for more precise fastener placement.

Popular Applications

Expendable pallets, sheathing, roof decking, subflooring, furniture frame assembly.

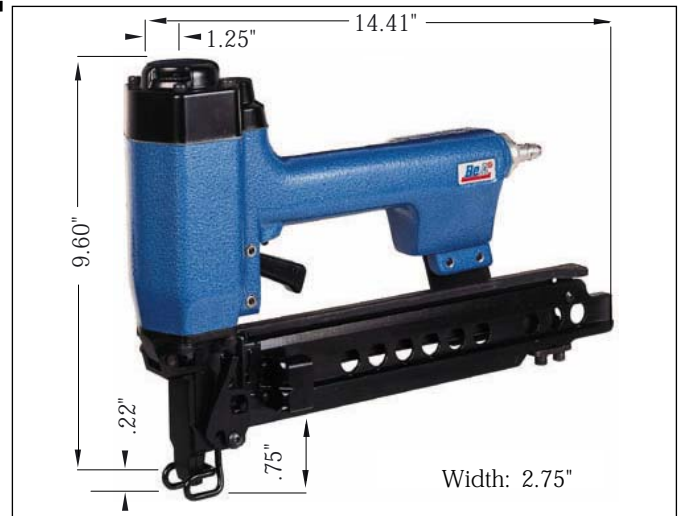

Technical data

Model:	14/50-763
Part number:	12000257
Magazine type:	top loading
Work contact:	bump trip
Fastener type:	14 and 16
Magazine capacity:	150
Standard load, strips x staples/strip:	2 x 75 type 14, 2 x 70 type 16
Operating pressure:	90-120 P.S.I.
Maximum operating pressure:	120 P.S.I.
Air consumption/cycle:	.053 cu. ft./cycle @ 90 P.S.I.
Recommended hose I.D.:	Ø 3/8"
Weight:	5.5 lbs.
Items supplied with the tool:	Operating instructions, spare parts list, service instructions, silencer.

Subject to technical modification.

Accessories

Part number	Description
14403402	Remote firing valve assembly
14403536	Stationary mounting fixture

All BeA pneumatic tools can be jig-mounted.
We supply the necessary accessories.



This tool conforms to the EC Directive
for Machinery (89/392 EWG)


Pneumatic Stapler

14/50-763



BeA Fasteners U.S.A.
2100-120 Fairfax Road
Greensboro, NC 27407
Phone: (336) 510-4232
Fax: (336) 510-4233

Staples type 14 & 16

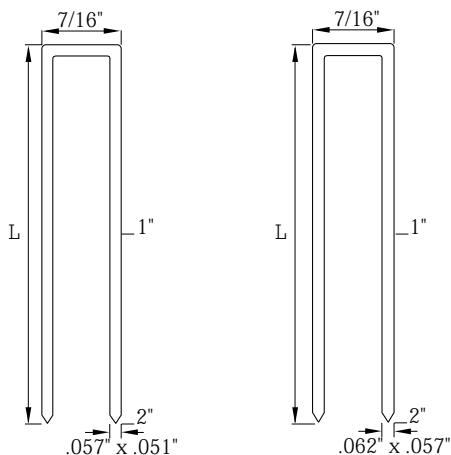

Description	L = Length inches
16/25 NK HZ	1"
16/32 NK HZ	1 1/4"
16/38 NK HZ	1 1/2"
16/45 NK HZ	1 3/4"
16/50 NK HZ	2"
16/25 BK HZ	1"
16/32 BK HZ	1 1/4"
16/38 BK HZ	1 1/2"
16/45 BK HZ	1 3/4"
16/50 BK HZ	2"
14/25 NK HZ	1"

Other lengths and finishes are also available on request.

Fastener nomenclature:

NK = Galvanized steel
NKS = Galvanized steel, high carbon
BK = Brite steel
BKS = Brite steel, high carbon

HZ = Resin coated
NR = Stainless steel
DP = Divergent point