


# Clinching Unit 380

The BeA bench-mounted clinching unit 380, drives type 380 staples from 1/4" to 5/16" in lengths. The tool can also be equipped with a nose to drive staples from 3/8" to 1". The clinching unit can be operated with contact trip or foot pedal operation and is also available as a double head tacker in both methods of operation. The high-capacity magazine cuts out time-wasting interruptions for reloading.

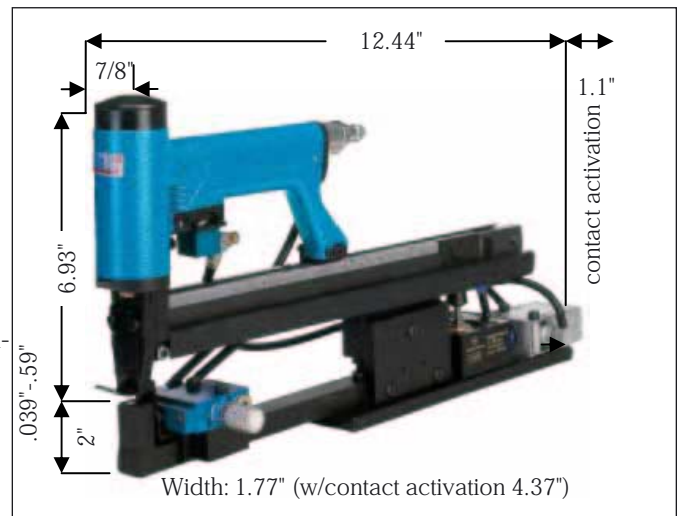

## Popular applications

Bag closure, tagging, packaging, automotive, shoe industry, arts and crafts, light assembly.

## Technical Data

Model:	380 Clinching Unit contact trip	380 Clinching Unit foot pedal operated
Part number:	12300262	12300263
Loading type:	top loading	top loading
Work contact:	contact trip	foot pedal
Staple type:	380	380
Magazine capacity:	360	360
Standard load, strips x staples/strip:	2 x 150	2 x 150
Operating pressure:	60-90 P.S.I.	60-90 P.S.I.
Maximum air pressure:	90 P.S.I.	90 P.S.I.
Air consumption:	.016 cu. ft./cycle @ 90 P.S.I.	.016 cu. ft./cycle @ 90 P.S.I.
Recommended hose I.D.:	ø 3/8"	ø 3/8"

Items supplied with tool: Operating instructions, spare parts list & service instructions.

Subject to technical modifications.

## Accessories:

Part number	Description
14401214	Special nose plate 3/8" to 5/8" staples

All BeA pneumatic tools can be jig mounted.  
We supply the necessary accessories.



This tool conforms to the EC Directive  
for Machinery (89/392 EWG)


# Clinching Unit

## 380



BeA Fasteners U.S.A.  
2100-120 Fairfax Road  
Greensboro, NC 27407  
Phone: (336) 510-4232  
Fax: (336) 510-4233

### Staple types 80/380



Description	L = Length inches
380/06 NK	1/4"
380/08 NK	5/16"
380/10 NK	3/8"
380/12 NK	1/2"
380/14 NK	9/16"
380/16 NKS	5/8"

Other lengths and finishes are also available on request.

#### Fastener nomenclature:

NK = Galvanized steel  
NKS = Galvanized steel, high carbon  
BK = Brite steel  
BKS = Brite steel, high carbon

HZ = Resin coated  
NR = Stainless steel  
DP = Divergent point