


Pneumatic Stapler 14/38-152

The BeA Pneumatic Stapler 14/38-152 is a versatile tool that drives staples type 14 in lengths from 5/8" to 1 5/8", type 16 in lengths from 1" to 1 5/8", as well as T-nails in lengths from 1" to 1 1/2". This durable and compact tool offers powerful driving of staples not only in industrial applications but also for the do it yourselfer.

Popular Applications

Furniture, boxes, paletts, framing, insulation, corrugated to wood, asphalt shingles.

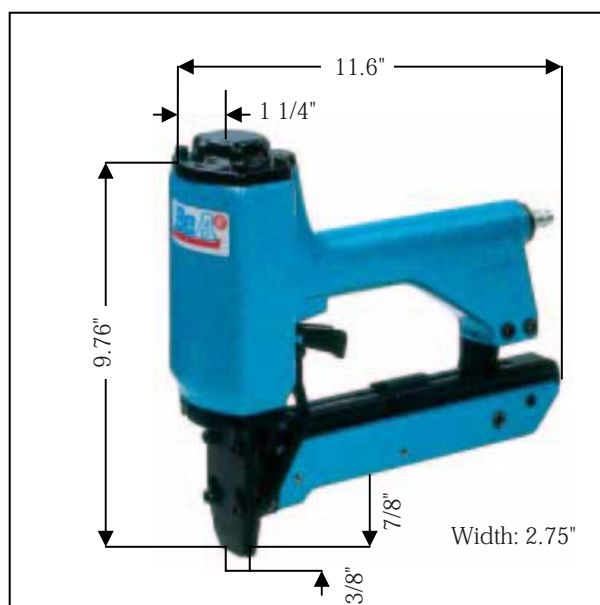

Technical Data

Model:	14/38-152 Standard
Part number:	12000174
Loading type:	top loading
Fastener type:	type 14, type 16 and T-nails
Magazine capacity:	120 x type 14, 110 x type 16, 82 x T-nails
Standard load, strips x fasteners/strip:	1 x 75 type 14, 1 x 70 type 16, 2 x 33 T-nails
Working pressure:	90-120 P.S.I.
Maximum air pressure:	120 P.S.I.
Air consumption:	.053 cu. ft./cycle @ 90 P.S.I.
Recommended hose I.D.:	ø 3/8"
Weight:	5.51 lbs.

Items supplied with tool: Operating instructions, spare parts list, service instructions, silencer.

Subject to technical modifications.

Accessories

Part number	Description
14400842	Adjustable roller edge guide (1/8" to 4 1/4")
2010035000	Roller edge guide for Nosag-clips
2010040000	Adjustable roller edge guide for plaster-board
14403402	Remote firing valve
14403442	Stationary mounting fixture
2015010610	Balance reel hanger

All BeA pneumatic tools can be jig mounted.
We supply the necessary accessories.




This tool conforms to the EC Directive
for Machinery (89/392 EWG)

Pneumatic Stapler 14/38-152



BeA Fasteners U.S.A.
2100-120 Fairfax Road
Greensboro, NC 27407
Phone: (336) 510-4232
Fax: (336) 510-4233

Fastener type 14, 16, and T-nails

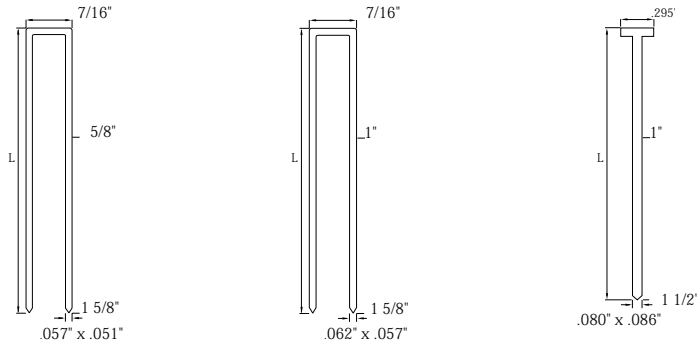

Fastener drawings are not full scale.

Description	L = Length inches
14/15 NK HZ	5/8"
14/18 NK HZ	3/4"
14/21 NK/HZ	7/8"
14/25 NK HZ	1"
14/28 NK HZ	1 1/8"
14/30 NK HZ	1 3/16"
14/32 NK HZ	1 1/4"
14/35 NK HZ	1 3/8"
14/38 NK HZ	1 1/2"
14/40 NK HZ	1 5/8"
16/25 NK HZ	1"
16/28 NK HZ	1 1/8"
16/30 NK HZ	1 3/16"
16/32 NK HZ	1 1/4"
16/35 NK HZ	1 3/8"
16/38 NK HZ	1 1/2"
16/40 NK HZ	1 5/8"
T 25 BK	1"
T 32 BK	1 1/4"
T 38 BK	1 1/2"

Other lengths and finishes are also available on request.

Fastener nomenclature:

NK = Galvanized steel
NKS = Galvanized steel, high carbon
BK = Brite steel
BKS = Brite steel, high carbon

HZ = Resin coated
NR = Stainless steel
DP = Divergent point