


Pneumatic Stapler

97/25-550

The BeA 97/25-550 is a light and powerful tool, that drives type 97 staples in lengths from 3/8" to 1". The bottom loading magazine allows for quick and easy reloading, the long slender nose allows fastening even in hard to reach areas and provides better visibility for more precise fastener placement.

Popular Applications

Corner blocks, drawer runners, picture framing, lattice panels, carpeting, case backs.

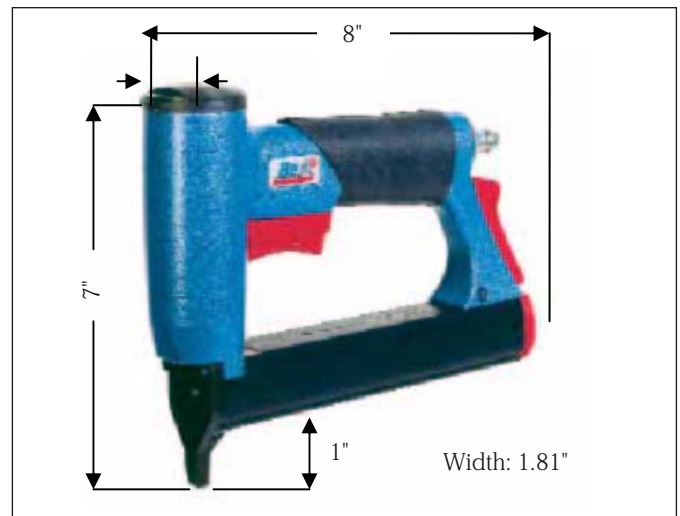

Technical Data

Model:	97/25-550 Standard	97/25-500 w/ work contact
Part number:	12000156	12000290
Loading type:	bottom loading	bottom loading
Fastener type:	97	97
Magazine capacity:	156	156
Standard load, strips x fasteners/strip:	1 x 100	1 x100
Working pressure:	75-90 P.S.I.	75-120P.S.I.
Maximum air pressure:	90 P.S.I.	120 P.S.I.
Air consumption:	.015 cu. ft./cycle @ 90 P.S.I.	.015 cu. ft./cycle @ 90 P.S.I.
Recommended hose I.D.:	ø 3/8"	ø 3/8"

Weight:	2.64 lbs.	2.67 lbs.
---------	-----------	-----------

Items supplied with tool:	Operating instructions, spare parts list, service instructions, silencer.
---------------------------	---

Subject to technical modifications.

Accessories

Part number	Description
14400827	Roller edge guide
14405569	Remote firing valve
14405571	Stationary mounting fixture

All BeA pneumatic tools can be jig mounted.
We supply the necessary accessories.




This tool conforms to the EC Directive
for Machinery (89/392 EWG)

Pneumatic Stapler 97/25-550



BeA Fasteners U.S.A.
2100-120 Fairfax Road
Greensboro, NC 27407
Phone: (336) 510-4232
Fax: (336) 510-4233

Fastener type 97



Part number	Description	L = Length in.
10001746	97/10 NK	3/8"
10000469	97/12 NK	1/2"
10000478	97/14 NK	9/16"
10000485	97/16 NK	5/8"
10000499	97/19 NK	3/4"
10000508	97/22 NK	7/8"
10000517	97/25 NK	1"

Other lengths and finishes are also available on request.

Fastener nomenclature:

NK = Galvanized steel
NKS = Galvanized steel, high carbon
BK = Brite steel
BKS = Brite steel, high carbon

HZ = Resin coated
NR = Stainless steel
DP = Divergent point