


Pneumatic Stapler

92/25-553

Lightweight at only 2.65 lbs. this tool drives BeA type 92 staples from 1/2" to 1" in length. Heavy duty aluminum cylinder and piston insure exceptional durability in high volume production environments. Exhaust muffler for quiet operation. Available in a flare or outward clinch nose version. Also available with a sequential work contact.

Popular Applications

Casebacks, drawers, underlayment sheathing.

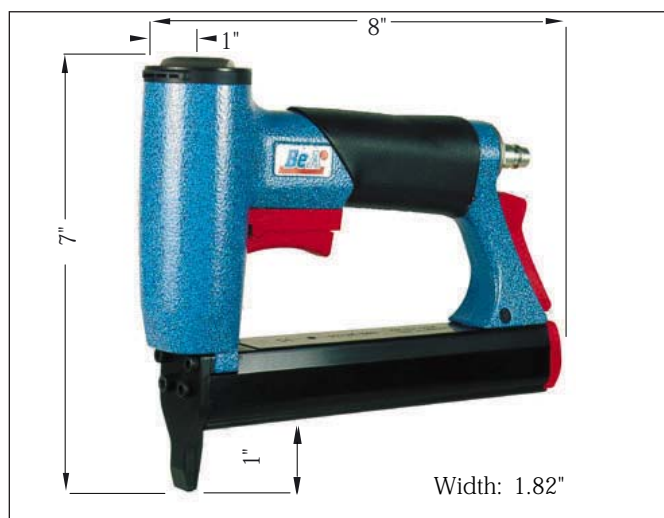

Technical Data

Model:	92/25-553 Standard	92/25-553 Sequential Sequential actuation
Part number:	12000159	12000295
Magazine type:	bottom loading	bottom loading
Staple type:	92	92
Magazine capacity:	120	120
Standard load, strips x staples/strip:	1 x 100	1 x 100
Operating pressure:	75-90 P.S.I.	75-90 P.S.I.
Maximum air pressure:	90 P.S.I.	90 P.S.I.
Air consumption:	.016 cu. ft./cycle @ 90 P.S.I.	.016 cu. ft./cycle @ 90P.S.I.
Recommended hose I.D.:	ø 3/8"	ø 3/8"
Weight:	2.65 lbs.	2.67 lbs.
Items supplied with tool:	Operating instructions, spare parts list, service instructions.	

Subject to technical modifications.

Accessories

Part number	Description
14405569	Remote firing valve assembly
14405571	Stationary mounting fixture
14406526	Flaring nose set

All BeA pneumatic tools can be jig mounted.
We supply the accessories.



This tool conforms to the EC Directive
for Machinery (89/392 EWG)


Pneumatic Stapler

92/25-553



BeA Fasteners U.S.A.
2100-120 Fairfax Road
Greensboro, NC 27407
Phone: (336) 510-4232
Fax: (336) 510-4233

Staple type 92



Description	L = Length inches
92/12 NK HZ	1/2"
92/15 NK HZ	5/8"
92/18 NK HZ	3/4"
92/21 NK HZ	7/8"
92/25 NK HZ	1"

Other lengths and finishes are also available on request.

Fastener nomenclature:

NK = Galvanized steel
NKS = Galvanized steel, high carbon
BK = Brite steel
BKS = Brite steel, high carbon

HZ = Resin coated
NR = Stainless steel
DP = Divergent point