


Pneumatic Stapler

92/32-612

The compact and well-balanced BeA 92/32-612 is a powerful tool that produces very low noise levels. Its main applications are door and window manufacturing and case goods assembly. The available long magazine version makes the tool even more versatile.

Popular Applications

Case goods, door and window manufacturing, building siding, case backs, trim work.

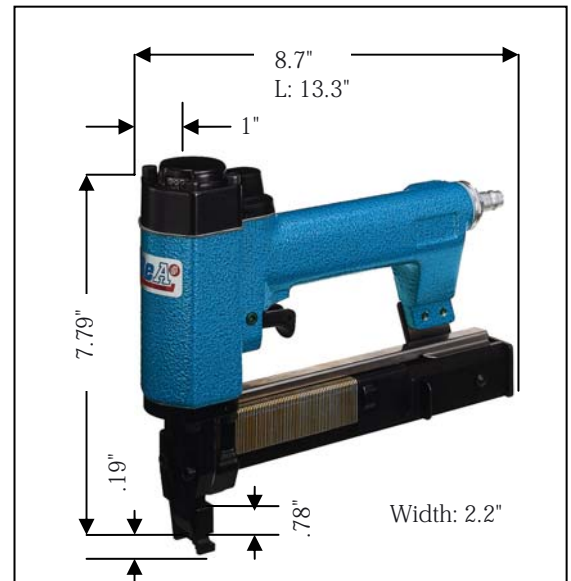

Technical Data

Model:	92/32-612 Standard	92/32-612 L Long-magazine
Part number:	12000210	12000211
Loading type:	top loading	top loading
Fastener type:	92	92
Magazine capacity:	125	215
Standard load, strips x fasteners/strip:	1 x 100	2 x 100
Working pressure:	90 - 120 P.S.I.	90-120 P.S.I.
Maximum air pressure:	120 P.S.I.	120P.S.I.
Air consumption:	.035 cu. ft./cycle @ 90 P.S.I.	.035 cu. ft./cycle @ 90 P.S.I.
Recommended hose I.D.:	ø 3/8"	ø 3/8"
Weight:	3.24 lbs.	3.94 lbs.

Items supplied with tool: Operating instructions, spare parts list, service instructions, silencer.

Subject to technical modifications.

Accessories

Part number	Description
14403421	Remote firing valve
14403527	Stationary mounting fixture

All BeA pneumatic tools can be jig mounted.
We supply the necessary accessories.



This tool conforms to the EC Directive
for Machinery (89/392 EWG)


Pneumatic Stapler

92/32-612



BeA Fasteners U.S.A.
2100-120 Fairfax Road
Greensboro, NC 27407
Phone: (336) 510-4232
Fax: (336) 510-4233

Staple type 92



Description	L = Length
92/28 NK HZ	1 1/8"
92/32 NK HZ	1 1/4"

Other lengths and finishes are also available on request.

Fastener nomenclature:

NK = Galvanized steel
NKS = Galvanized steel, high carbon
BK = Brite steel
BKS = Brite steel, high carbon

HZ = Resin coated
NR = Stainless steel
DP = Divergent point