


# Pneumatic Stapler

## 14/40-723

The compact and durable tool for staples type 14/16 in lengths from 3/4" to 1 5/8". This tool is excellent for applications requiring speed. Excellent driving power for hard woods.

### Popular Applications

Crates, pallets, manufactured housing, box building, wall and roof sheathing, sub-flooring, furniture.

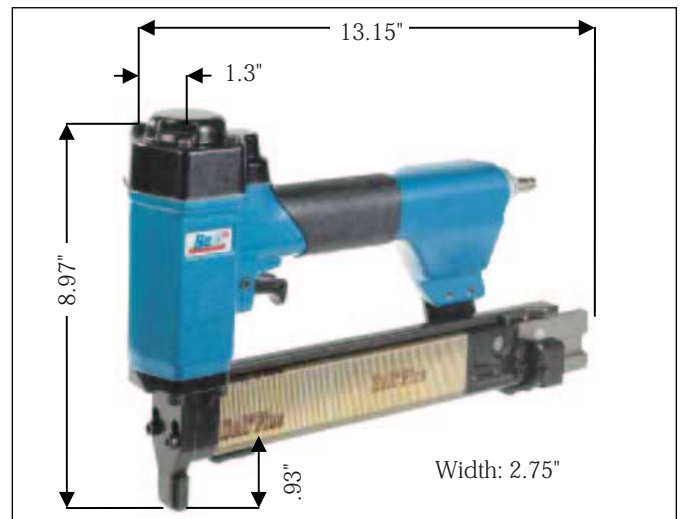

### Technical Data

Model:	<b>14/40-723</b>
Part number:	12000344
Magazine type:	top loading
Staple type:	Type 14, and 16
Magazine capacity:	159 type 14, 149 type 16
Standard load, strips x staples/strip:	2 x 75 type 14, 2 x 70 type 16
Operating pressure:	75-120 P.S.I.
Maximum air pressure:	120 P.S.I.
Air consumption:	.035 cu. ft./cycle @ 90 P.S.I.
Recommended hose I.D.:	ø 3/8"

Weight:	4.62 lbs.
---------	-----------

Items supplied with tool:	Operating instructions, spare parts list, service instructions.
---------------------------	---

Subject to technical modification.

### Accessories

Part number	Description
14403421	Remote firing valve
14403536	Stationary mounting fixture
14400887	Nosag clip attachment

All BeA pneumatic tools can be jig mounted. We supply the necessary accessories.



This tool conforms to the EC Directive for Machinery (89/392 EWG)


# Pneumatic Stapler

## 14/40-723



BeA Fasteners U.S.A.  
2100-120 Fairfax Road  
Greensboro, NC 27407  
Phone: (336) 510-4232  
Fax: (336) 510-4233

### Staple types 14 and 16

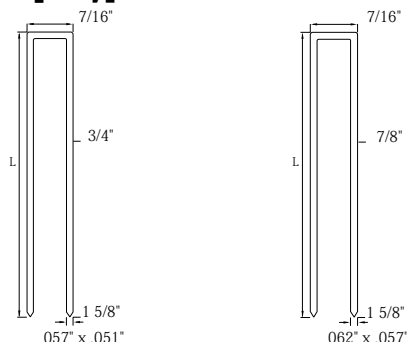

Description	L = Length inches
14/18 NK HZ	3/4"
14/21 NK HZ	7/8"
14/25 NK HZ	1"
14/28 NK HZ	1 1/8"
14/32 NK HZ	1 1/4"
14/35 NK HZ	1 3/8"
14/38 NK HZ	1 1/2"
14/40 NK HZ	1 5/8"
16/21 NK HZ	7/8"
16/25 NK HZ	1"
16/28 NK HZ	1 1/8"
16/32 NK HZ	1 1/4"
16/35 NK HZ	1 3/8"
16/38 NK HZ	1 1/2"
16/40 NKHZ	1 5/8"

Other lengths and finishes are also available on request.

#### Fastener nomenclature:

NK = Galvanized steel  
NKS = Galvanized steel, high carbon  
BK = Brite steel  
BKS = Brite steel, high carbon

HZ = Resin coated  
NR = Stainless steel  
DP = Divergent point