


Pneumatic Stapler

14/50-763 A

This light, well-balanced and rugged heavy duty stapler drives BeA type 14 and type 16 staples from 1" to 2" in length. The 14/50-763 stapler has a quick release nose for easy jam clearance. The slender nose affords better operator visibility for more precise fastener placement. The cycling frequency can be adjusted infinitely from 0-500 cycles per minute.

Popular Applications

Expendable pallets, sheathing, roof decking, subflooring, furniture frame assembly.

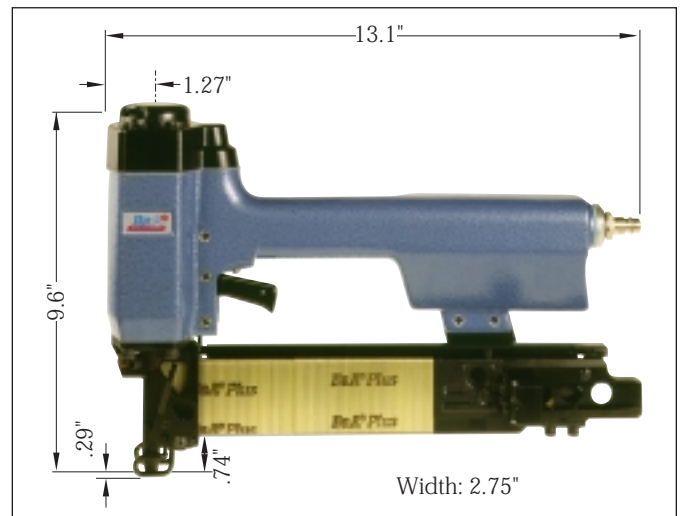

Technical data

| | |
|--|--------------------------------|
| Model: | 14/50-763 A |
| Part number: | 12000360 |
| Magazine type: | top loading |
| Work contact: | bump trip |
| Fastener type: | type 14 and 16 |
| Magazine capacity: | 156 x type 14, 144 x type 16 |
| Standard load, strips x staples/strip: | 2 x 75 type 14, 2 x 70 type 16 |
| Operating pressure: | 90-120 P.S.I. |
| Maximum operating pressure: | 120 P.S.I. |
| Air consumption/cycle: | .053 cu. ft./cycle @ 90 P.S.I. |
| Recommended hose I.D.: | Ø 3/8" |
| Weight: | 3.74 lbs. |

Items supplied with the tool: Operating instructions, spare parts list, service instructions, silencer.

Subject to technical modification.


Pneumatic Stapler

14/50-763 A



BeA Fasteners U.S.A.
2100-120 Fairfax Road
Greensboro, NC 27407
Phone: (336) 510-4232
Fax: (336) 510-4233

Staples type 14 & 16

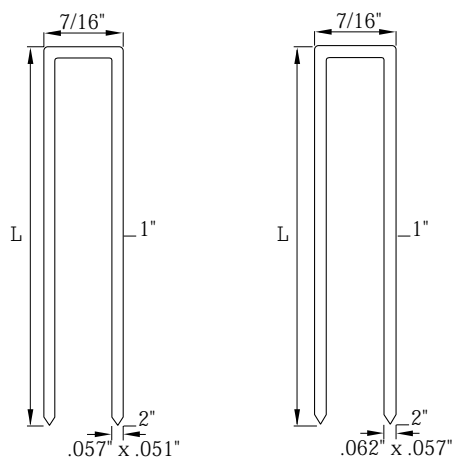

| Description | L = Length inches |
|-------------|----------------------|
| 16/25 NK HZ | 1" |
| 16/32 NK HZ | 1 1/4" |
| 16/38 NK HZ | 1 1/2" |
| 16/45 NK HZ | 1 3/4" |
| 16/50 NK HZ | 2" |
| 16/25 BK HZ | 1" |
| 16/32 BK HZ | 1 1/4" |
| 16/38 BK HZ | 1 1/2" |
| 16/45 BK HZ | 1 3/4" |
| 16/50 BK HZ | 2" |
| 14/25 NK HZ | 1" |

Other lengths and finishes are also available on request.

Fastener nomenclature:

NK = Galvanized steel
NKS = Galvanized steel, high carbon
BK = Brite steel
BKS = Brite steel, high carbon

HZ = Resin coated
NR = Stainless steel
DP = Divergent point